

**Affordability, Convenience, Efficiency for all your Cold Storage needs!**

**CoolBot**<sup>®</sup>  
— WALK IN COOLER



## *Think Inside the Box*

- Save \$1,000s vs. traditional cooling systems and enjoy energy savings up to 42%
- Perfect for: Agriculture, Brewing, Floral, Dairy, Hunting, Food Storage, Wine
- Assembles in as little as 1 hour
- Powered by the revolutionary CoolBot Pro and an LG window air conditioner




- Enjoy cold storage powered by revolutionary CoolBot Pro technology
- Energy Efficient insulating Cam Lock panels for reliability both indoors & outdoors
- No expensive refrigeration system installation or repairs
- UL/ETL and NSF certified panels come with a 10 year warranty and are easy to clean
- Energy savings / green conscious
- Simple DIY installation with commercial grade materials
- CoolBot Pro and LG air conditioner included
- CoolBot Pro offers remote temperature monitoring and alerts via CoolBot Pro App
- Includes exterior temperature readout, vapor proof led light, door closer
- Over 50,000 CoolBots in use keeping products refrigerated

Get Connected - Stay Cool™

[www.storeitcold.com](http://www.storeitcold.com) | [cooler@storeitcold.com](mailto:cooler@storeitcold.com) | (888) 871-5723

## 6' x 6' WALK-IN COOLER

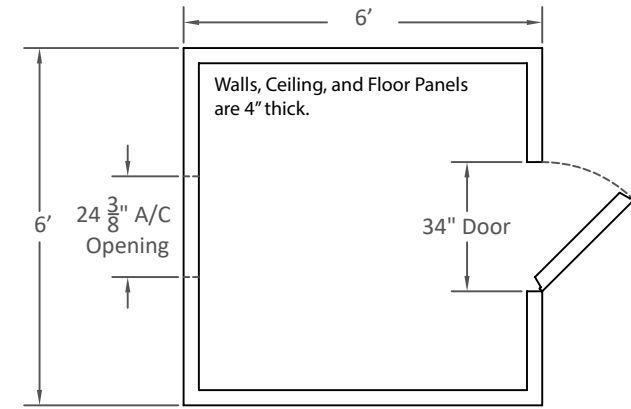

Cooler Nominal Dimensions shown - Contact us for Actual Dimensions

## OPTIONS

- Indoor or Outdoor
- With or w/out Floor  
Outdoor coolers must have a floor
- A/C Position (Back, Left, or Right Wall)
- Door Position (Front, Left or Right Wall)
- Door Hinges (Left or Right)

## ADD-ONS

Available for Indoor Coolers only

- 48" Door - w/out a floor ONLY
- Door Window (12" x 12")
- Wall Windows (24" x 24")

## TECHNICAL DATA

### BOX HEIGHT

Exterior / Interior (With Floor)	7' - 8 $\frac{3}{4}$ " / 7' - 0 $\frac{3}{4}$ "
Exterior / Interior (Without Floor)	7' - 4" / 7' - 0"

### INSULATION

High Density Foam, UL/ETL classified	4"
Core Flame Spread	15
Smoke Rating	<165

### WALL/CEILING PANELS

Interior Finish	26 Ga. Stucco Embossed Galvanized
Exterior Finish	26 Ga. Stucco Embossed Galvanized

### FLOOR PANELS (FLOOR OPTION)

Standard NSF Panel	Smooth Aluminum
Load Rating (Stationary)	600 Lbs/ Sq. Ft

### DOOR

Standard NSF Left or Right Hinges (chosen at time of order)	34"W x 78"H
Interior/Exterior Finish	26 Ga. Stucco Embossed Galvanized
Heavy Duty Deadbolt Handle Latch	Safety Release Mechanism
Self Closing Mechanism	Hydraulic
Vapor Proof Light & Globe	120 V, 0.8 Amp
Digital LED Thermometer with Pilot Light Switch	NSF Approved

### REFRIGERATION (INCLUDED)

CoolBot Pro Digital Controller	1
LG 10K BTU Window Air Conditioner	1


### ACCESORIES (SHIPPED LOOSE)

NSF Vinyl Floor Screeding (W/out Floor Option)	1 Set
A/C Rain Hood (Outdoor Package Option Only)	1
36 Mil KEE Polymer Membrane Roof Material (Outdoor Package Option Only)	1

# WI-FI ENABLED DIGITAL TEMPERATURE CONTROLLER



GET CONNECTED - STAY COOL™

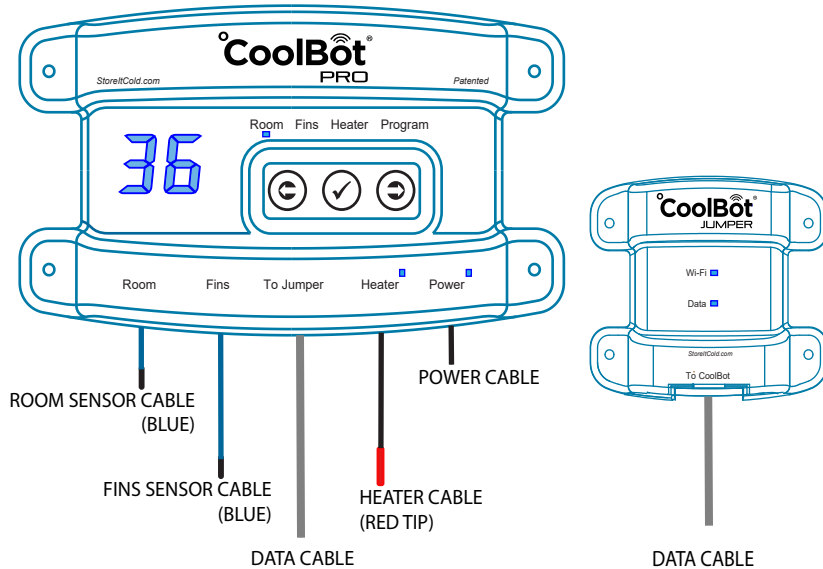


## FEATURES

The CoolBot Pro is a patented Wi-Fi enabled temperature controller that enables users to create a low-cost walk-in cooler using a standard digitally-controlled Window or Mini Split A/C unit.

- User friendly installation and operation
- Can be set to Fahrenheit or Celsius
- Power Auto Restart - your last settings saved in memory
- Simple User Interface with Capacitive Touch Buttons or via App
- Temperature Setting Range: 32°F ~ 65°F / 0°C ~ 18°C
- Wi-Fi Relay Module included - Jumper
- Remote Temperature Monitoring (via App)
- Settings Adjustment via App
- User-designated Temperature Ranges for Alerts and Notifications (via App)
- Critical Alerts via SMS and e-mail (on mobile device or PC via App)
- Temperature Log Graphic (via App)

## COMMON USES



## REQUIREMENTS

- A CoolBot Pro
- A room insulated with Rigid Foam to a value of R25
- A compatible Digitally-Controlled Window or Mini-Split A/C unit
- An available Wi-Fi Network and Internet Connection (if using Wi-Fi and App Features)

## TECHNICAL DATA

### CONNECTIONS / SENSORS AND CABLES

2.5mm / Temperature Sensor Cables (Blue)	2
2.5mm / Heater Cable (Red Tip)	1
RJ11 / Data Transfer Cable (Grey / Silver)	1
Mini USB / UL Listed Power Supply	1

### ELECTRICAL RATINGS

Input Voltage 50-60Hz	120-240 VAC
Output Voltage	5 VDC
Output Amps	1 Amp

### MATERIALS / FINISH

Case	Plastic
Color	Dark Blue

### DIMENSIONS

Controller (LxWxD)	6 x 3.4 x 1.1 inches
Jumper (LxWxD)	4 x 3.6 x 1.1 inches
Sensor Cables and Heater (L)	36 inches
Data Cable	25 feet
Shipping (LxWxD)	10 x 6 x 2.8 inches
Net Weight	13.6 oz
Shipping Weight	20 oz

### WARRANTY

Standard	1 Year
Extended (Testimonial Form required)	2 Years

### UPC CODE

SKU Number	CC-S0HV-MOUT
------------	--------------

[WWW.STOREITCOLD.COM](http://WWW.STOREITCOLD.COM)



<https://twitter.com/storeitcold>  
<https://www.instagram.com/storeitcold>  
<https://www.facebook.com/thecoolbot>  
<https://www.youtube.com/storeitcold>

Design, features and specifications are subject to change without notice. Weights and measurements are approximate.

Rev 2018-07A © 2018 Store It Cold, LLC.

## COOL A LOT WHILE YOU SAVE EVEN MORE

Cool a lot while you save even more. We've got you covered with 10,000 BTUs that can cool a room up to 450 square feet. With its stylish remote you can even get your cool on from across the room. And set up is a cinch with our easy-to-use installation kit.



### PERFORMANCE

- 10,000 BTU
- CEER 12.0 / EER 12.1
- Dehumidification (Pts/Hr) 2.7
- Est. Cooling Area 450 sq. ft. (Room size 18' x 25')

### FEATURES

- 3 Cooling & Fan Speeds with Auto Cool
- 4-Way Air Direction
- Power Failure Auto Restart
- Remote Control
- Timer 24 Hr. On/Off
- Slide-Out Washable Filter

### 3 Cooling & Fan Speeds with Auto Cool

Three powerful cooling and fan speeds allow you to control the temperature of your room at your pace.

### 4-Way Air Direction

Enjoy the cool air even more with our 4-way air direction. By adjusting the deflection, air is directed up, down, left or right to move the air where it's needed most.

### Electronic Touch Controls with Remote

Control the temperature of your room with just a push of a button. Our stylish remote control is easy to use and allows you to cool down from across the room.

### PERFORMANCE

BTU Performance	10,000
CEER	12.0
EER	12.1
ENERGY STAR®	Yes
Dehumid. (Pts/Hr)	2.7
Dry Air Flow (CFM)	280
dBa Level (Indoor/Outdoor)	52/60
Est. Cooling Area (SQ. FT.)	450
Refrigerant	R32

### FEATURES

Thermostat Control	Thermistor
Air Deflection	4-Way
Remote Controller	Yes
Auto Restart	Yes
Energy Saver Function	Yes
Timer	24 Hr, On/Off
Filter Alarm Function	Yes
Fan Speed Cooling	3
Fan Only Speed	3
Compressor	Rotary
In Door Fan Type	Turbo
Type Air Discharge	Top Discharge
Outdoor Vent/Exhaust	Yes
Chassis Type	Slide In-Out

### MATERIALS/FINISHES

Available Colors	White
------------------	-------

### ELECTRICAL RATINGS

Voltage/60Hz	115
Watts	820
Rated Amps	7.7

### DIMENSIONS

Product (WxHxD)	23 5/8" x 15" x 22 3/16"
Shipping (WxHxD)	27 5/32" x 18 7/16" x 23 1/2"
Net Weight	74 lbs.
Shipping Weight	83 lbs.

### LIMITED WARRANTY

	1 Year Parts and Labor
--	------------------------

### UPC CODES

LW1016ER	048231 379465
----------	---------------



## LG Electronics U.S.A., Inc.

1000 Sylvan Avenue Englewood Cliffs, NJ 07632  
 Customer Service and Technical Support: (800) 243-0000  
[LG.com](http://LG.com)

Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate.

© 2016 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies. 04/16